

Les Hughes Rugby League fields


 15,000 m²



4 Days after the turf was installed


Below is the process we follow to ensure a great outcome for all:

- 1 WHS documentation including Work Method Statement, Site Specific Safety Plan, Construction Schedule
- 2 Service location before commencing any works, DIAL BEFORE YOU DIG
- 3 Site establishment and construction fencing to surround site
- 4 Soil tests and soil amendments applied
- 5 Supplied and install a temporary irrigation system to the fields
- 6 Installation of temporary irrigation system installed and tested prior to tufing
- 7 Supplied and apply soil conditioner, RRA Organics
- 8 Blecavate 3 passes
- 9 Laser Level Field and Final Trim
- 10 Supplied and Install certified and inspected 15,000 sqm Wintergreen turf
- 11 Supplied and apply Ronstar and starter fertiliser
- 12 Supplied and apply pesticide
- 13 Supplied and apply controlled release fertiliser
- 14 1st mow and Sweep
- 15 2nd Mow, Sweep and Topdressing 10mm
- 16 3rd Mow and Sweep
- 17 4th Mow, Sweep
- 18 5th Mow Sweep and Topdressing 10mm
- 19 Maintenance of field for 13 week included temporary fence line, mowing and whippinging
- 20 Line marking
- 21 At time of handover we had to ensure less than 1% weeds are present in the playing surface
- 22 During turf maintenance period we had to guarantee 100% coverage and establishment of turf
- 23 We had to provide "As Constructed Drawings" to be provided to the MBRC representative
- 24 Leave the field in a condition ready for use upon completion of the project

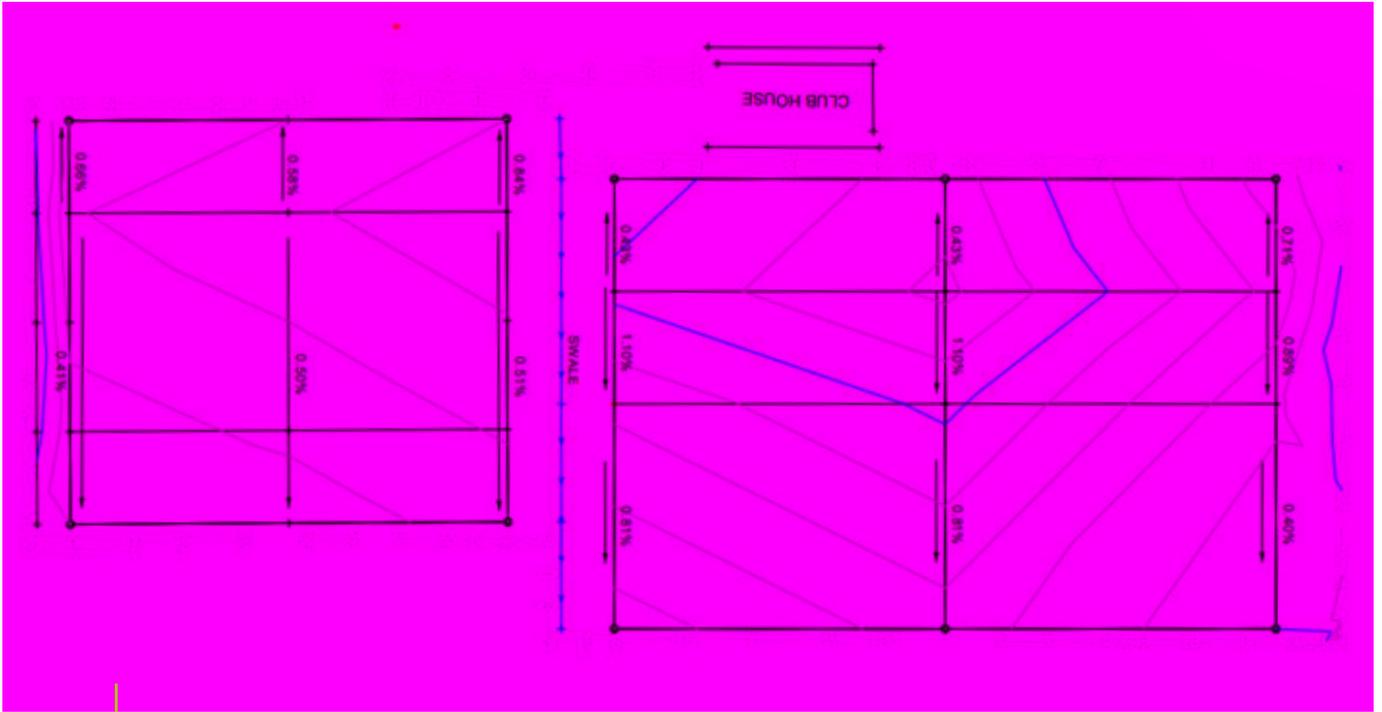

After surveying the site and working with the lay of the land, the above designed was proposed as the best solution for the playing surface.



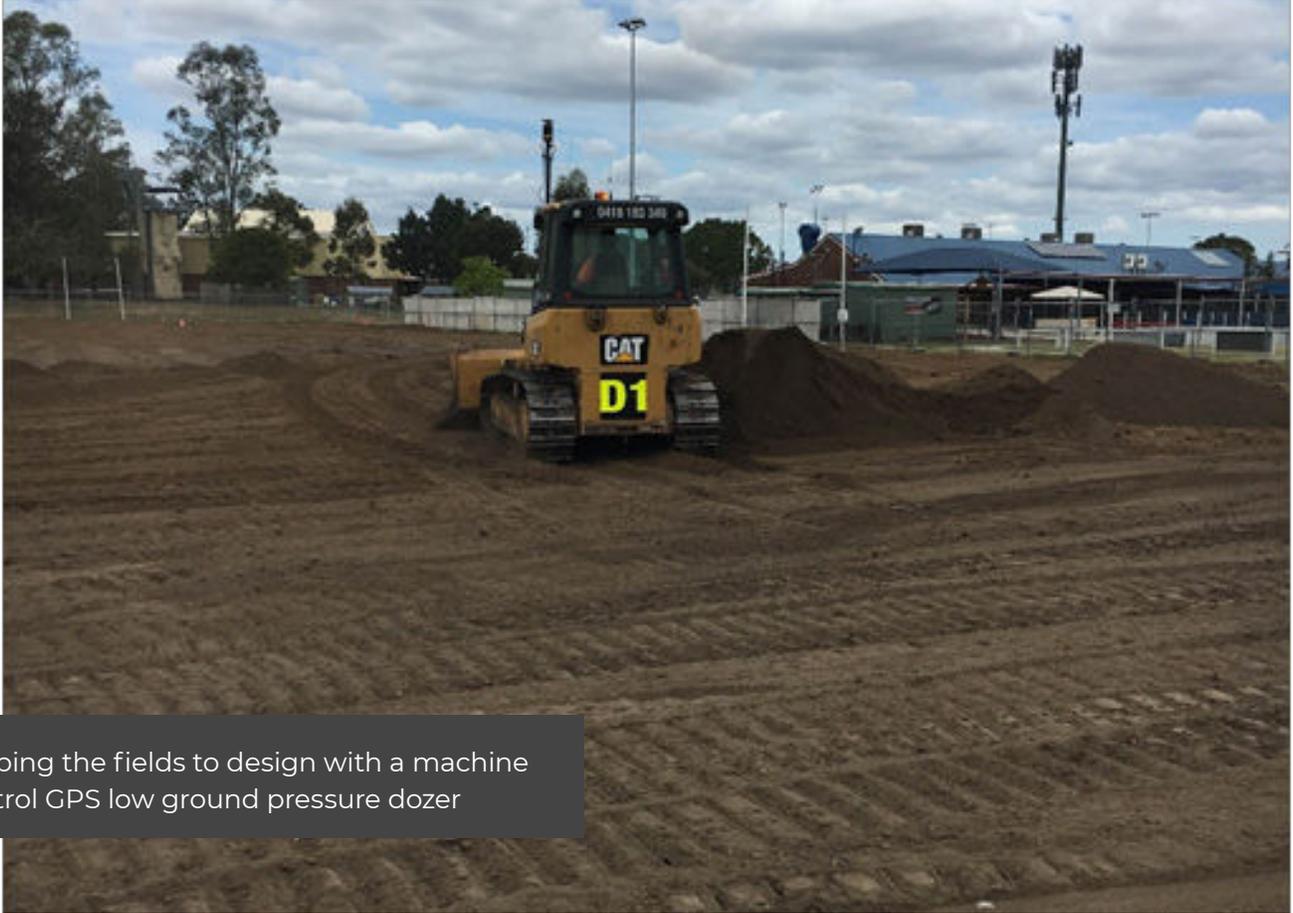

Shaping the fields to design with a machine control GPS low ground pressure dozer



Turf being harvested for the field 15,000 sqm in 3 days.